

INDUCTION HOBS





CODE ID

INDUCTION HOB WITH REAR VENTING 80

FCLHD 9041 HID TS BK2



-  Flush Top Installation
-  Semi-Flush Top Installation
-  Slide Touch Control
-  Glass Ceramic Surface
-  Temperature Sensor
-  Residual Heat System
-  Booster
-  Timer
-  Flexi Zone
-  Pan Detection System

INDUCTION HOB WITH REAR INNER VENTING

Cera Black ceramic surface

PERFORMANCE

4 cooking zone
2 horizontal flexi zone
Rapid heating booster
Automatic heating
Keep warm
End of cooking timer
Rear hood with electric opening
Suction power: 645 m³/h
Sound level: from 53 to 63 dBA
Energy efficiency class: A+

FEATURES

Touch slider controls
Flush Top Installation
Space-saving motor

SAFETY

Pans detection sensor
Safety switch (accidental use prevention)
Residual heat indicator (H)
Automatic shutdown with temperature sensor

OPTIONAL ACCESSORIES


FHCF 59: set of 2 HP filters for filter version



CERABLACK
FCLHD 9041 HID TS BK2

FULGOR MILANO

INDUCTION HOB

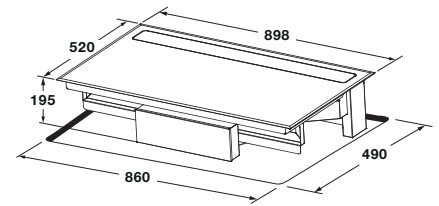

FCLHD 9041 HID TS BK2	
Type	ARIA + with integrated rear venting
Finishing	CeraBlack
INDUCTION PERFORMANCES	
Octa Ø 290 / 180 DUAL	2100 / 3700 (x 4) W
Flexi zone	•
Max absorbed power (W)	7360 W
Preloaded temperatures 42 ° C Melting	•
70 ° C Slow cooking	•
90 ° C Simmer	•
INDUCTION COMMANDS	
Programming	Slider touch
AUTO cooking	•
Timer	•
Residual Heat Indication (H)	•
Warning indicator sound / Pan detection	• / -
Safety lock Key	•
Power levels n.	9 + P
Visual digit display	•
HOOD FEATURES	
Energy efficiency class	A +
Levels of aspiration	•
Delayed auto shut-off	• / 10 min
Grease filter saturation indicator	• / 30 h
HP filter replacement light	-
Grease filters with oil / type collection	-
Dishwasher safe grease filters	•
Minimum Ø air discharge	rectangular 220 x 90
Air flow non-return FLAP	-
HP filter for filter (optional)	FHCF 59
AUTO opening (2 steps)	45° - 90°
Commands	Touch
Extractive capacity up to m3 / h	645 m³/h
Noise emissions (dBA)	53 - 63
Estimated annual consumption (kWh)	43,3
BRHM Motor (W)	220
ACCESSORIES	
Scraper	-
Cord	•
DIMENSIONS	
Width mm	898
Height mm	-
Depth mm	520
Cut-out (W x D) mm	860 x 490